


# Technical Specifications

Actros 5

3352S 6x4

Truck tractor with steel suspension

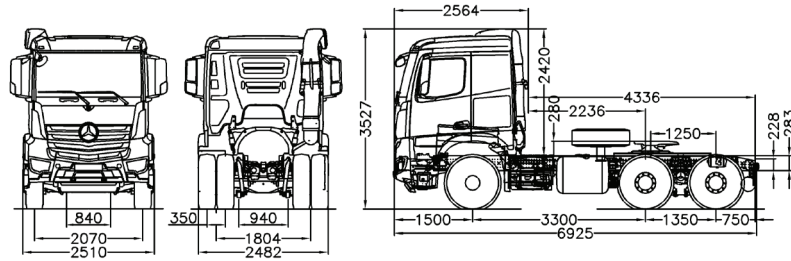

## General information

Baumuster	964.416
Specifications date	January 2020
Emissions standard	Euro III
Cab version	L-cab ClassicSpace, 2.30 m, tunnel 170 mm
Wheelbase	Wheelbase 3,300 mm
Rear overhang	Frame overhang 750 mm

## Dimensions [mm]

	Laden	Unladen
Frame height at front	1,016	1,107
Frame height at rear	1,022	1,094
Total height incl. air intake	3,527	
Ground clearance at front	317	
Ground clearance at rear	321	
Turning circle [m]	18.20	

## Engine

Model Displacement	OM473
Displacement [l]	15.6
Rated output [kW(hp)]	380(517hp)
Max. torque [Nm]	2600

## Power transmission

Clutch Transmission	Double-disc Clutch
Final drive ratio	Transmission G 330-12/11.63-0.77
	Axle ratio i = 4.143

**Note:** Subject to change without notice. All the information in this data sheet should be viewed as indicative. Please consult your Mercedes-Benz commercial vehicle dealer for final details.  
Version : 01/2020



## Chassis

Front springs	Front springs, 8.0 t, 3-leaf		
Rear springs	Leaf suspension, rear axle		
	<b>Axles</b>	<b>Tyres</b>	<b>Tyres</b>
Front axle	Front axle 8.0 t	315/80 R 22.5	15-degree tapered rims, 9.00x22.5, reinforced
Rear axle	Rear axle, crown wheel 300, planetary, 13.4 t	315/80 R 22.5	15-degree tapered rims, 9.00x22.5, reinforced

## Equipment


Brakes	Drum brakes on front and rear axle
Braking system	Electronic braking system with ABS and ASR
Engine brake	High Performance Engine Brake
Battery	Batteries 2 x 12 V/ 170 Ah, low-maintenance
Battery carrier	Multi-battery carrier, batteries side by side
Fuel capacity	430 l, left + 430 l, Right, 860 l, total capacity
Steering	Steering, single-circuit
Frame	High-strength with continuous U-section side members with constant web height, hole pattern 50x50 mm, frame track at rear 744 mm

## Vehicle Masses [kg]

	Front Axle	Rear Axle	Total
Manufacturer's mass	8,000 (GA)	26,000 (GAU)	33,000(GVM)
Permissible mass	7,700 (A)	18,000 (AU)	25,700 (V)
Tare mass**	5,421	4,316	9,737
Payload/fifth-wheel load	2,279	13,684	15,963
Manufacturer's gross combination mass (GCM)	80,000		
Permissible drawing vehicle mass (D/T)	80,000		


\*\* Tare Mass refers to the mass of the unladen vehicle in ready to drive condition, chassis with cab and / or coupling device for truck tractors . Including coolant, oils, spare wheel but excluding fuel and driver as per the National Road Traffic Act (NRTA) regulations.

## Road speeds (theoretical) in km/h at 1 800 r/min

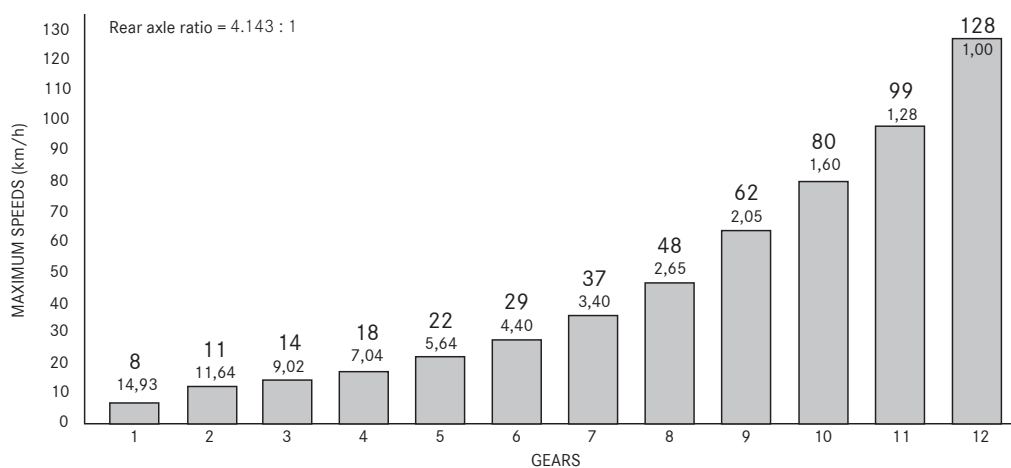

**Note:** Subject to change without notice. All the information in this data sheet should be viewed as indicative. Please consult your Mercedes-Benz commercial vehicle dealer for final details.  
Version : 01 /2020



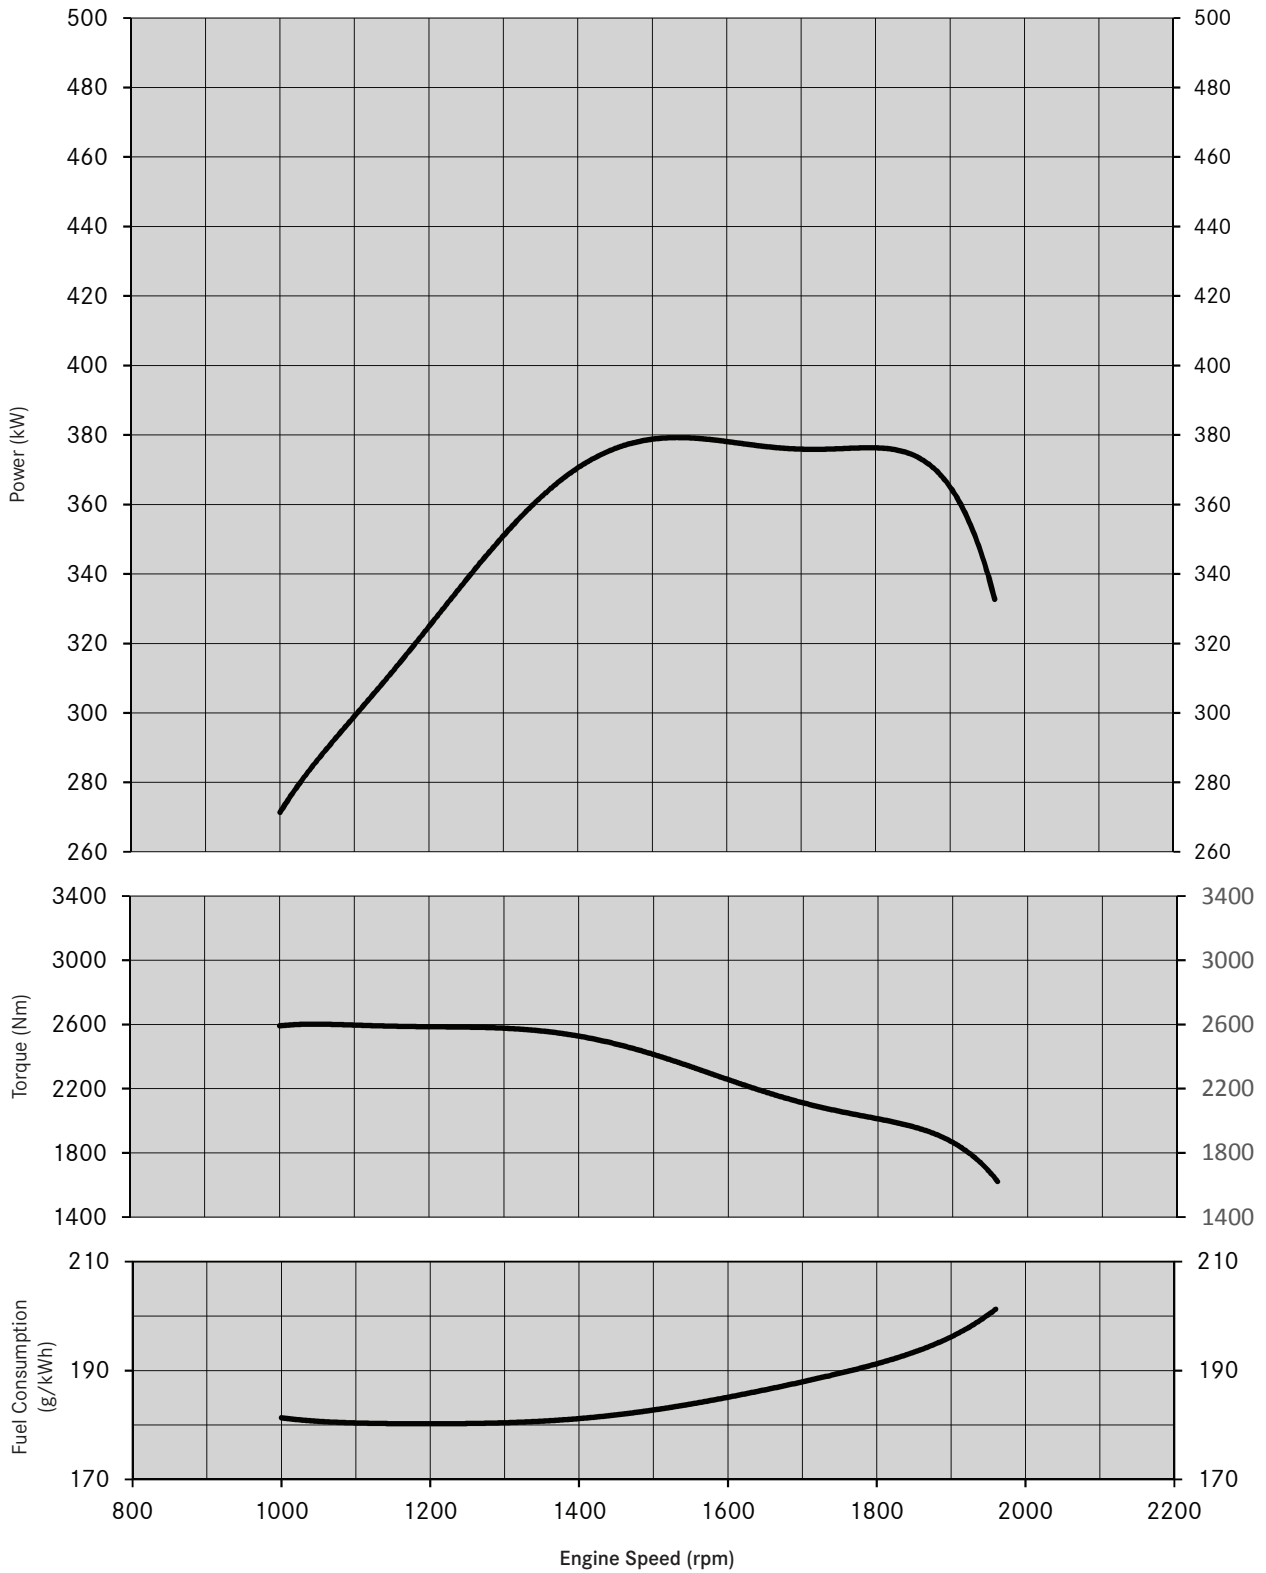

**Power, Torque**

OM 473, 380 kW at 1600/min,  
Euro III 2600Nm at 1100/min

**Stationary full load curves**

**Note:** Subject to change without notice. All the information in this data sheet should be viewed as indicative. Please consult your Mercedes-Benz commercial vehicle dealer for final details.  
Version : 01/2020



## Sales Codes in Alphabetic Order

A1D	Front axle 8.0 t	F1D	L-cab ClassicSpace, 2.30 m, tunnel 170 mm
A1Y	Front axle, straight version	F1R	L-cab
A2G	Rear axle, crown wheel 300, planetary, 13.4 t	F2E	Floor var. tunnel 170mm, for stowage compart. left
A5W	Axle ratio i = 4.143	F2G	Cab width 2.30 m
B1B	Electronic braking system with ABS and ASR	F2N	Cab, 600 mm attachment height
B1H	Electr. compressed air supply and control, centre	F2U	ClassicSpace
B1F	Heating, electronic air-processing unit	F3A	Cab mountings, standard, steel-sprung
B2B	Drum brakes on front and rear axle	F3E	Cab mountings, rear, reinforced
B2X	Parking brake, electronic	F3W	Cab tilting mechanism, mechanical-hydraulic
B3H	Water-type secondary retarder	F4H	Cab rear wall, without window
B4A	Condensation monitoring, for compressed air sys.	F4X	Stowage compartment exterior flap, left
B4M	Air reservoir, steel	F4Y	Stowage compartment exterior flap, right
B5I	Brake and electrical connections, high	F5Y	A-pillar trim
C0A	Frame overhang 750 mm	F6D	Windscreen, tinted, with filter band
C1K	Wheelbase 3300 mm	F6I	Front mirror, heated
C5B	Step plate above frame, partial cover	F6Q	Air horn
C5D	Step, behind cab, left	F7B	Bumper, with steel corners
C5P	Bolted frame	F7C	Bumper centre section with towing eyes
C6C	Steering, single-circuit	F7Y	Cab entrance, left/right, movable
C6J	Power steering pump, uncontrolled	F8B	2 remote control keys
C6Q	Stabiliser, front axle	F8E	Locking system, with central locking
C7I	Battery carrier cover, lockable	F8F	Extended central locking
C7Z	Frame, non-assembled, stage II (CKD)	F8H	2 remote control keys, additional
C8T	Deletion, wings for chassis transit	F8W	Rain sensor
D0S	Compressed-air connection, in cab	G0B	Powertrain, 44 t to 80 t
D1B	Driver's suspension seat, standard	G0K	Drive program, economy/power
D1N	Fold-up co-driver's seat	G0R	Transmission support arms, optimised for removal
D2N	Driver's seat backrest, release mechanism	G2F	Transmission G 330-12/11.63-0.77
D2W	Armrests on both sides, co-driver's seat	G5B	Double-disc clutch
D2Y	Seat belt monitor	G5G	Mercedes PowerShift 3
D3B	Luxury bed, bottom	H1N	Fifth-wheel lead +1250 mm
D3X	Seat cover, flat-weave fabric	H8X	Multi-battery carrier, batteries side by side
D4Y	Sunblind, side, driver's side	J1E	Instrument cluster, 12.7 cm, with add. displays
D5Y	Rubber mats, driver's and co-driver's side	J1Z	Speedometer, deletion, tachograph
D6F	Air conditioning system	J2H	Multimedia Radio Touch
D6Z	Construction-site filter	J2I	Standard loudspeaker
D7G	Stowage compartment lid, driver and co-driver side	J3R	Truck Data Center 7 (FB Card)
D7J	Drawers, under bed	J6A	Classic Cockpit
D7R	Stowage flaps, above windscreen	J8Z	Pre-install.for Truck Data Center 7 (FB Card)
D8A	Roof hatch/vent, roof	K0T	Main tank, left
E1B	Batteries 2 x 12 V/170 Ah, low-maintenance	K0W	Second tank, right
E1N	Alternator 28 V/100 A	K1V	Tank, 430 l, left, 735 x 700 x 1000 mm, aluminium
E3E	Additional socket, 12 V/15 A, co-driver footwell	K5M	Tanks, lockable
E3L	Socket, 24 V/15 A, co-driver footwell	K5Q	Fuel screen, tank filler neck
E3W	PSM, 2nd generation	K6T	Second tank, 430 l, right,735 x 700 x 1000 mm,alu.
E5A	No. 1 switch, for non-MB body electrics	K7D	Exhaust system, tailpipe to right and outwards
E6A	Trailer socket, 24 V, 15-pin	L1I	Fog lamps, LED daytime running lamps
E6Z	Reversing buzzer	L1P	LED tail lights
F0G	Side module, N3G vehicle	M0A	Engine mounts, reinforced
F0X	Mirror cover, on-road vehicle	M0C	Bottom shell to prevent swirling-up of dust

**Note:** Subject to change without notice. All the information in this data sheet should be viewed as indicative. Please consult your Mercedes-Benz commercial vehicle dealer for final details.  
Version : 01/2020



## Sales Codes in Alphabetic Order

M0Z	Noise regulation acc. to UN-R 51.03, phase 1	S8A	First aid kit
M3N	Eng. OM473,inline 6, 15.6 l, 380kW (517hp),2600 Nm	S8C	Hazard warning triangle
M5T	Turbocompound	S8D	Warning lamp
M5V	High Performance Engine Brake	V0R	No check for N3G conformity
M5W	Engine version, Euro III	V0V	Overhang angle, rear, minimum 25 degrees
M6L	Air compressor, 2-cylinder	V0X	Ground clearance under front axle, minimum 250 mm
M7I	Insect screen in front of cooling system	V0Y	Ground clearance under rear axle, minimum 250 mm
M7J	Guard plate, bumper	V1I	Actros BM964
M7U	Cooling output for hot regions	V1Z	Grounder
M8B	Air intake behind cab, mounted	V3L	Actros BM964 model generation 5
M8L	Cyclone filter for coarse dust	V8A	Chassis number FIN
M8Y	Fuel pre-filter, chassis-mounted, additional	W5X	Weight variant 33.0 t (8.0/13.0/13.0)
N2E	PTO MB 131-2c, pump	X1A	Instrument/labels/documentation, English
N6Z	Transmission oil cooling	X2I	Model plate, export
Q0W	Fifth-wheel coupling ex factory	X3W	Powertrain warranty as per T and Cs 3yrs/450,000km
Q0Y	Angle of inclination not as per DIN ISO 1726	Y4A	Telescopic jack, 12 t/19 t
Q1N	Front spring, 8.0 t, 3-leaf	Y4J	2 wheel chocks
Q3A	Rear spring, 2 x 13.0 t	Y4W	Tool kit, extended
Q4L	Fifth wheel coupling height = 190 mm	Y4X	Tyre inflating hose, 25 m
Q4X	Fifth wheel coupling, manually lubricated	Y4Z	Compressed-air gun, with hose
Q6E	Mounting plate, 40 mm, 36 t	Y6A	Country-specific version
Q6P	Fifth-wheel coupling, heavy-duty, 2", Jost JSK 38C	Z4P	Tank cross-section, wide
Q6W	Fifth wheel angle, extended, h = 50 mm	Z4R	Tank cross-section, high
R1I	15-degree tapered rims, 9.00 x 22.5, reinforced	Z5F	OM 473
R8P	Spare wheel/spare wheel rim	Z5M	PTO, single
S1H	Lane Keeping Assist	Z5S	Power take-off, pump, under top edge of frame
S1L	Attention Assist	Z5W	Right-hand drive
S3A	Airbag, driver	Z5Z	Vehicle, for left-side traffic
S5E	Speed limiter, 80 km/h	Z9X	Consolidated consignment (CKD)
S5Z	Cruise control	Z9Y	Delivery condition (CKD)

**Note:** Subject to change without notice. All the information in this data sheet should be viewed as indicative. Please consult your Mercedes-Benz commercial vehicle dealer for final details.  
Version : 01/2020

